


- 29" Wheels
- 150mm rear wheel travel
- 150mm Suspension Forks
- 230x65 Metric Shock with 30x8 Hardware (Designed for Bearing Mounts)
- Boost 148x12 SRAM Maxle
- 1x Drivetrain optimised design, 52mm chainline, Boost cranks
- Bolt on ISCG05 chainguide mount
- 31.6mm Seat post with stealth dropper routing, 34.9mm seat clamp
- Full continuous external cable and hose routing
- Self locking collet pivot axle system
- 29" x 2.5" tyre clearance
- 160mm rear post disc brake mount
- Tapered ZS44 / ZS56 Headset
- 6066-T6 Tubeset
- 73mm BSA threaded bottom bracket
- Water bottle clearance
- Progressive Shock Curve
- Efficient Anti-Squat with Zero Pedal Bob
- Frame weight 3Kg (Size ML, no shock)

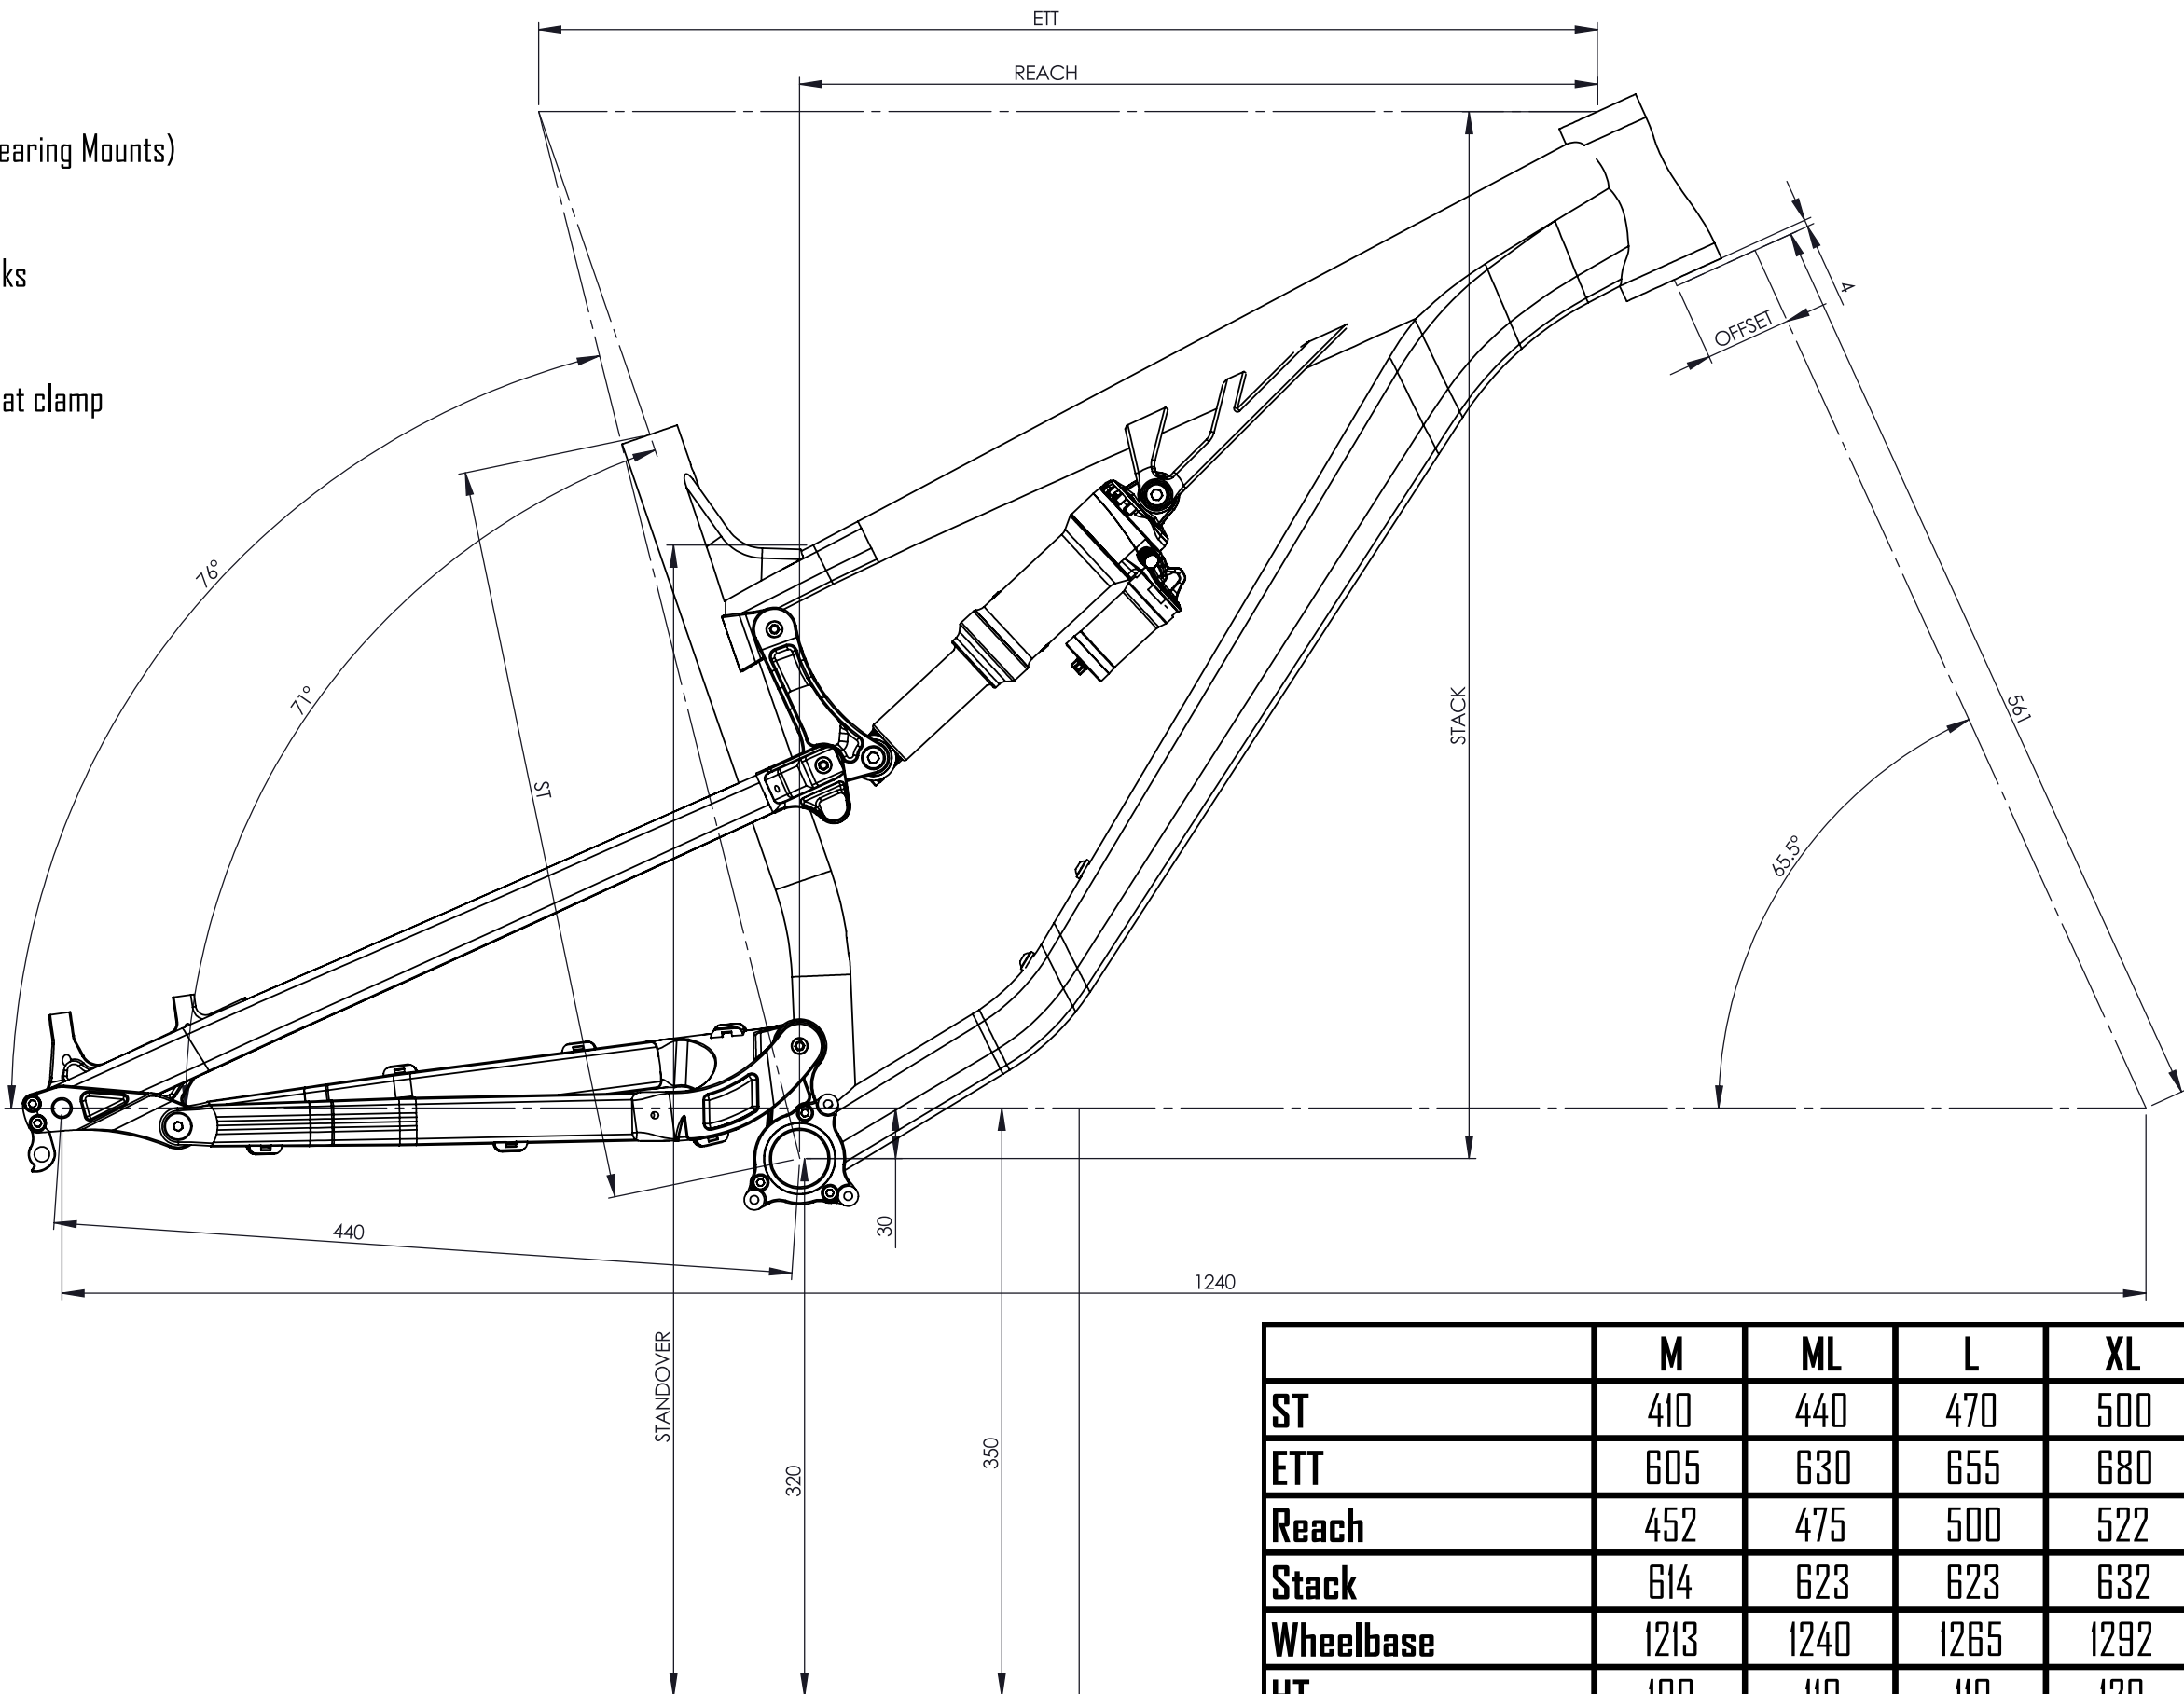

HA (sagged)	65
HA (static)	65.5
SA (static)	76
SA (sagged)	75.5
CS	440
BB drop (static)	30
BB drop (sagged)	78
BB height (static)	340
BB height (sagged)	292
A2C	561
Lower HeadSet	4

	M	ML	L	XL
ST	410	440	470	500
ETT	605	630	655	680
Reach	452	475	500	522
Stack	614	623	623	632
Wheelbase	1213	1240	1265	1292
HT	100	110	110	120
Standover	699	700	700	704