






	Geometry			
	Medium [M]	Medium Long [ML]	Large [L]	Extra Large [XL]
ETT	605	630	655	680
Reach	455	484	512	541
Stack	625	634	643	652
Seat tube	395	420	455	480
Head tube	110	120	130	140
Wheelbase	1202	1235	1268	1301
BB Drop	40			
[sagged]	[81]			
BB Height	330			
[sagged]	[289]			
Head angle	65			
[sagged]	[64.8]			
Seat angle	76.5	77	77.5	78
virtual	[71]	[72]	[73]	[74]
[actual]				
Fork A2C	551			
	[561 max, 541 min]			
Frame weight	2780g	2810g	2840g	2870g
[bare frame]				
Maximum Seatpost Insertion	350	375	400	425
Standover	707	707	707	707

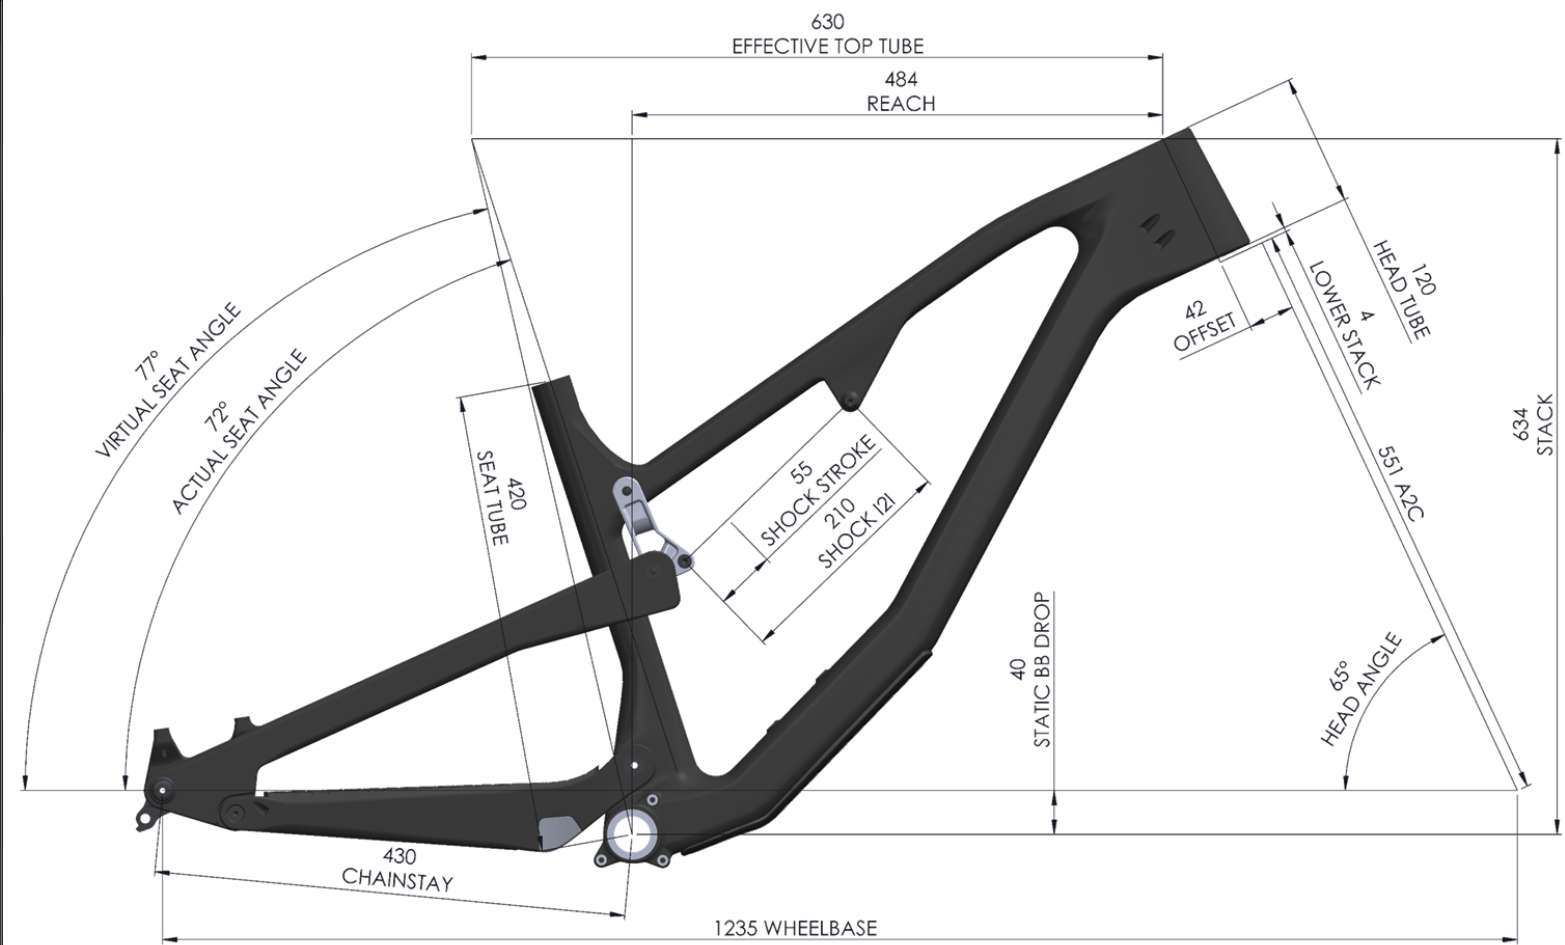

	Size Guide			
	5'6"	5'10"	6'2"	6'4"
	168cm	178cm	188cm	193cm
M				
ML				
L				
XL				

Enduro 

Mountain / Trail 

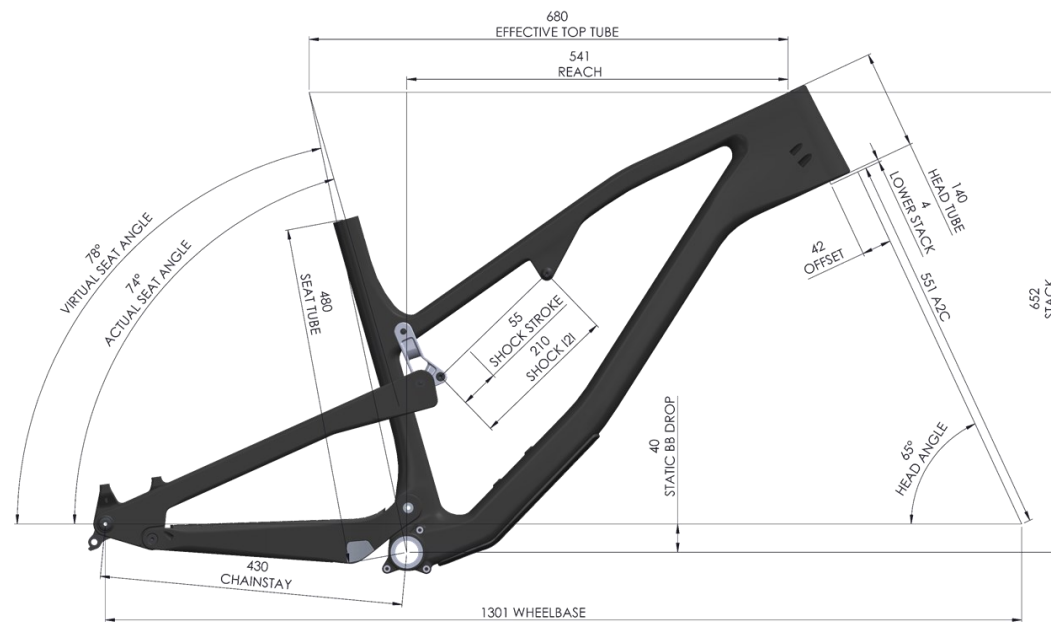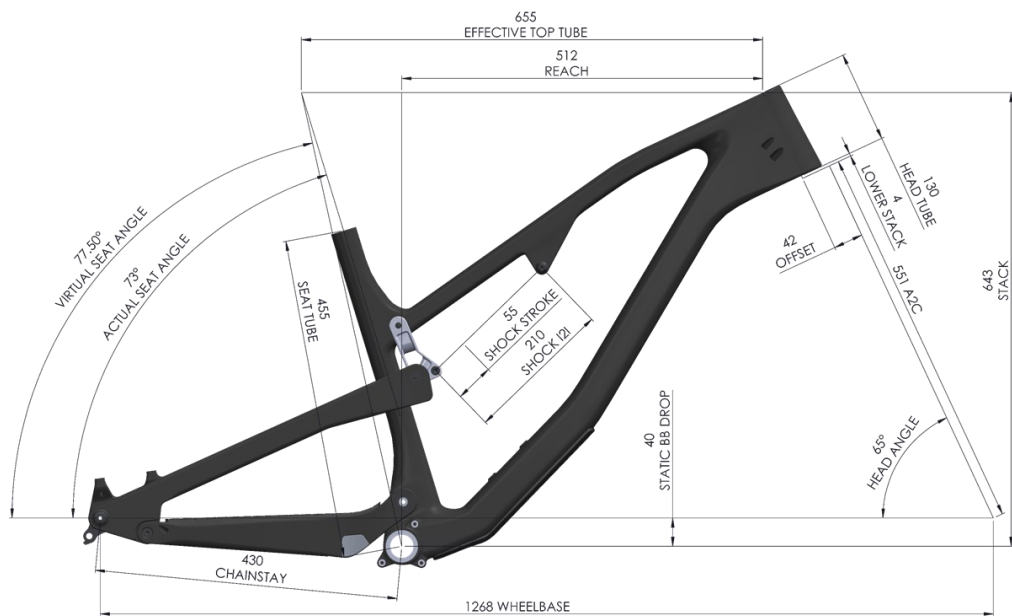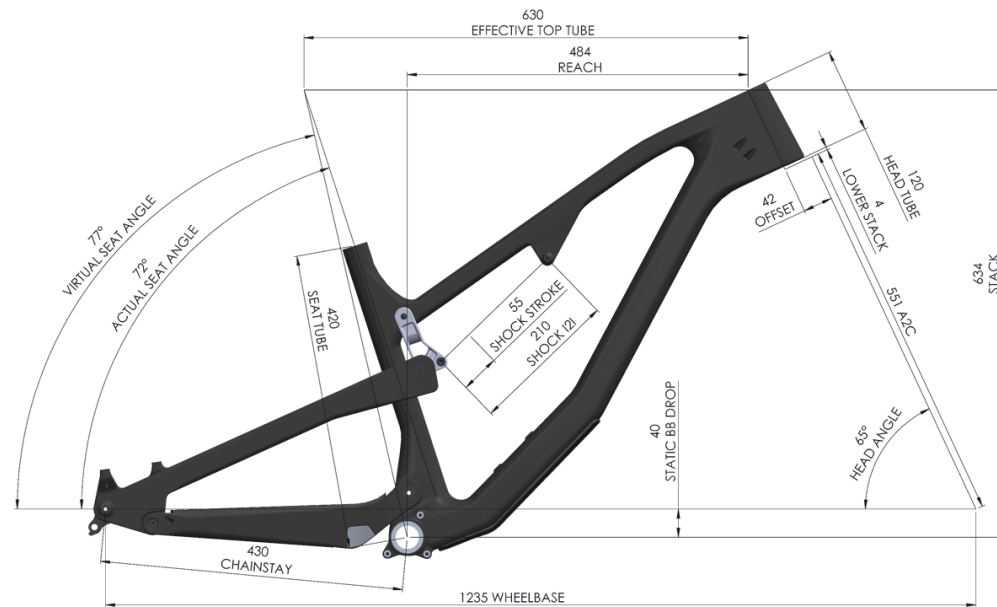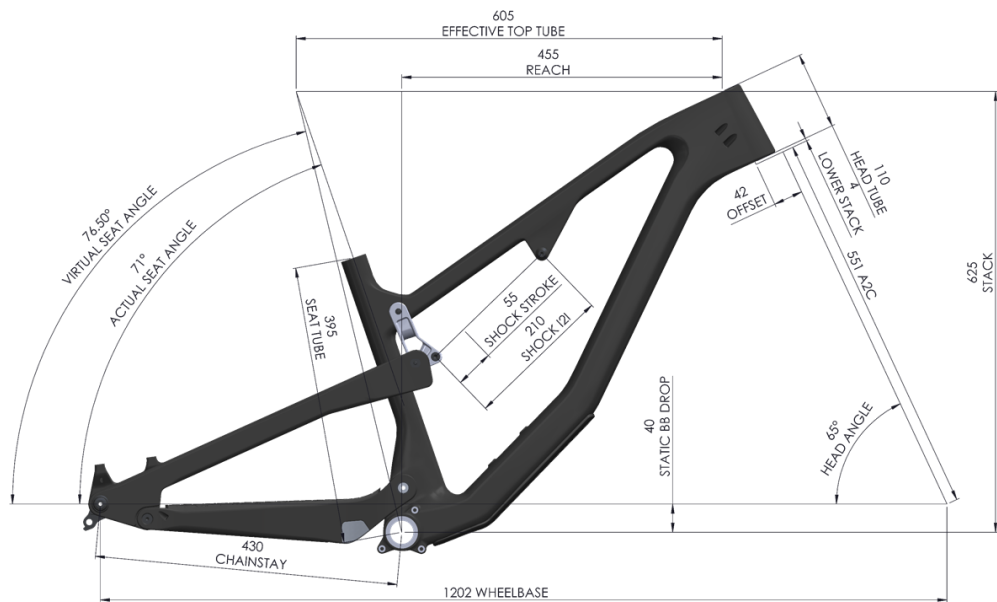

Rear Travel	130mm
Front Travel	140mm [130mm-150mm]
Wheel Size	29"
Tyre Clearance	29" x 2.6"
Shock Size	210 x 55, 30 x 8 hardware both ends
Shock Tune	RS Air LL1 or LLC RS Coil ML1 or MLC
Rear Axle	180mm 12x1.0 for SRAM UDH
Rear Derailleur Hanger	SRAM Universal Derailleur Hanger (UDH)
Chain Guide Mounts	ISCG05, 1mm backset
Bottom Bracket	73mm BSA Threaded
Headset	Integrated 41mm top, 52mm bottom
Fork offset	42-46mm
Brake mount	160mm post
Seat post	31.6mm
Seat clamp	37mm
Rear axle	148x12, 180mm M12x1.0
Notes	Fork offset is a recommendation, not a rule. All offsets in the range 37-51mm will work, although the handling will change with the offset. The guidance provided is to show how we like it. Shock Tunes are given as guidance only.

